



CONTRACT NO. 62959

**NOTE**


\* MAXIMUM POST SPACING SHALL BE 3 m (10') C&C EXCEPT WHERE OTHERWISE SHOWN ON PLANS

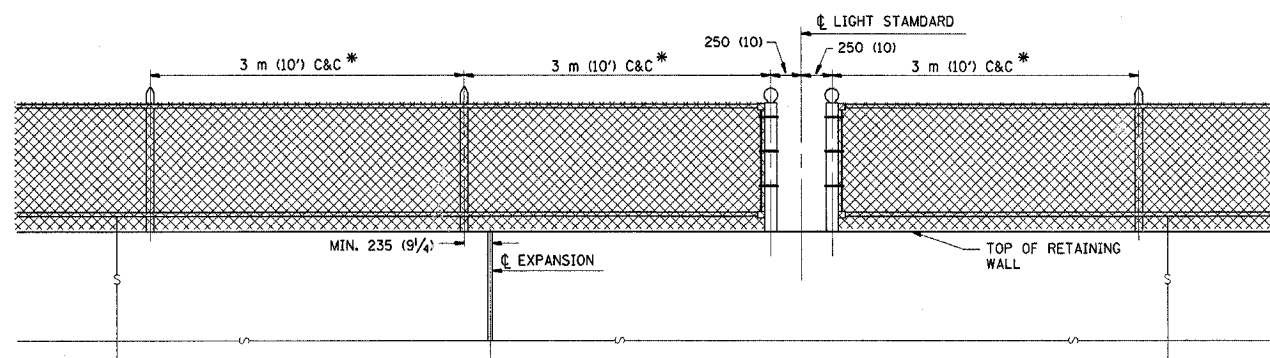


ELEVATION VIEW OF RETAINING WALL WITH PEDESTRIAN BARRIER TYPE III

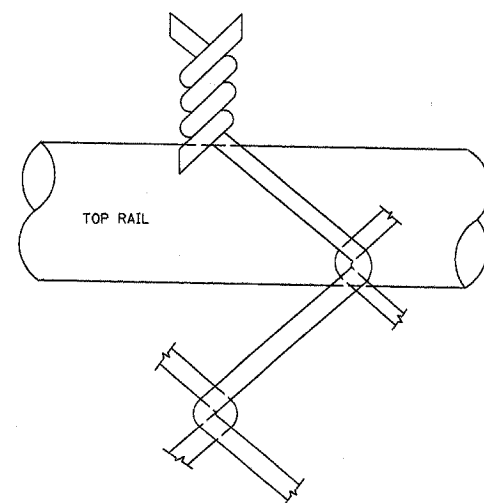

WIRE MESH FABRIC TO BE BARBED AT THE TOP

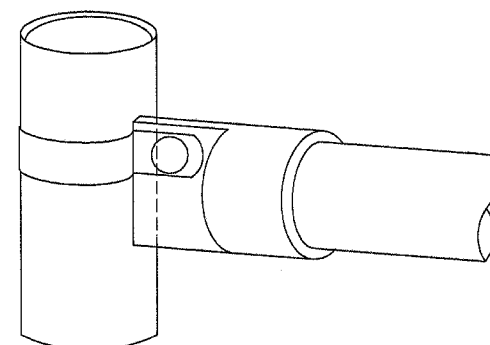


RAIL FITTING AT END POSTS

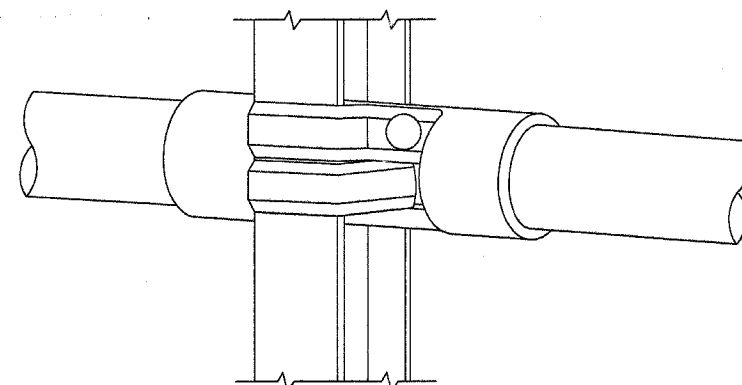


RAIL FITTING ON SECTION LINE POST


FOR INFORMATIONAL PURPOSES ONLY

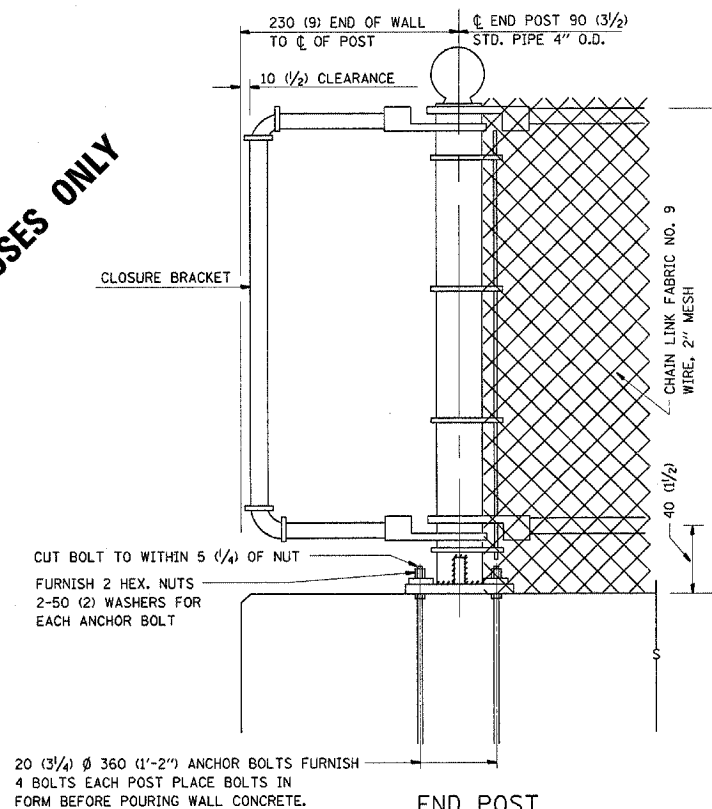

**NOTE:**  
THE COST OF FURNISHING ANCHOR BOLTS, NUTS, & WASHERS TO BE INCIDENTAL

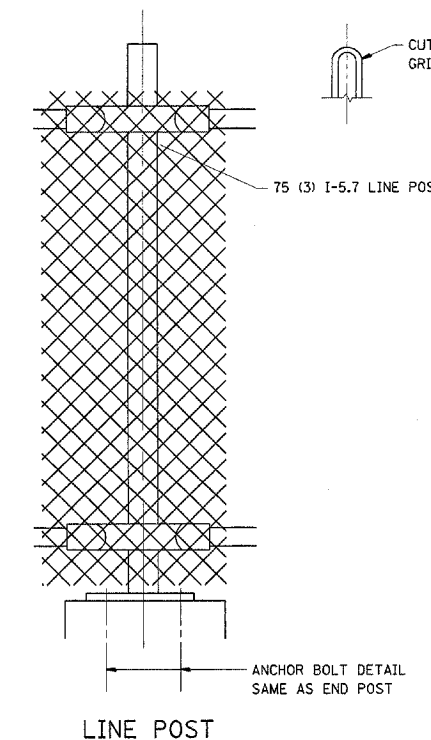


LINE POST

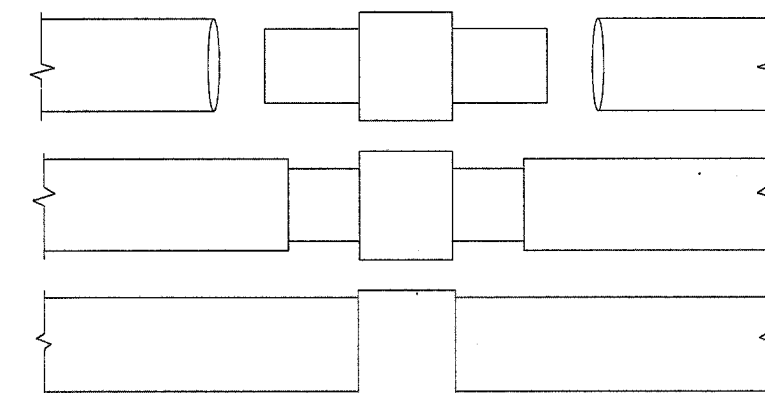


EXPANSION COUPLING DETAIL

**NOTE:**  
EXP. COUPLING TO APPEAR IN TOP AND BOTTOM RAILS WHERE EVER EXP. JT. APPEARS IN STRUCTURE.

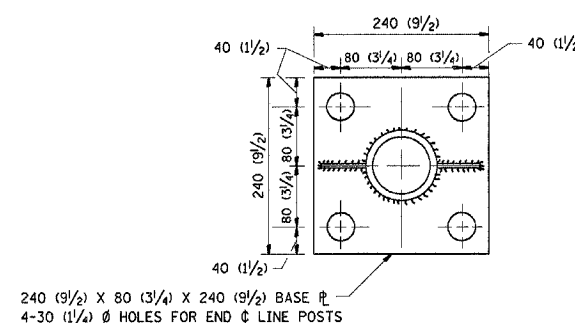

ANCHOR PLATE DETAILS

**NOTE:**  
POST, PLATE AND GUSSET ASSEMBLY SHALL BE GALVANIZED AFTER ALL CUTTING, DRILLING, WELDING, AND FABRICATION HAVE BEEN COMPLETED. THE GALVANIZED COATING SHALL CONFORM TO THE REQUIREMENTS OF AASHTO M 120. THE GALVANIZED COATING SHALL NOT BE LESS THAN 610 G/SQ M (2.0 OZ./SQ. FT.) OF SURFACE.

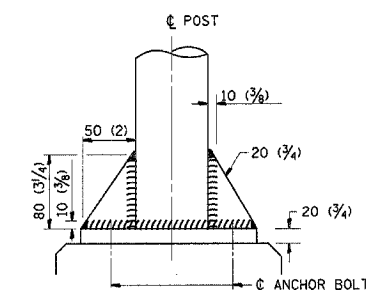

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

PEDESTRIAN BARRIER TYPE III  
STD. 10-SS-514 R

SCALE: NONE

DATE: 9/16/2005

DRAWN BY C.A.D.D.

CHECKED BY

REVISIONS	
NAME	DATE